

T-14, T-2 4t受枠仕様 充填深さ 70/40mm

溝幅 (mm)	呼称	本体寸法					P10 スキマ=6.00		P15 スキマ=11.00		受枠				
							適用荷重								
		h ₁	W	W ₁	L	h	T-14	T-2	T-14	T-2	アングルサイズ	A	A ₁	H	質量 (kg/両側m)
							質量(kg/枚)	質量(kg/枚)	質量(kg/枚)	質量(kg/枚)					
100	710	70	188	132	599	105	8.0	7.3	7.4	6.7	L112×50×4t	200	280	112	10.5
	410	40				75	6.5	5.8	6.0	5.3	L82×50×4t			82	8.6
150	715	70	238	182		105	9.0	8.2	8.4	7.6	L112×50×4t	250	330	112	10.5
	415	40	75	7.4		6.6	6.9	6.1	L82×50×4t	82	8.6				
200	720	70	288	232		105	9.9	9.0	9.4	8.5	L112×50×4t	300	380	112	10.5
	420	40	75	8.3		7.4	7.7	6.8	L82×50×4t	82	8.6				
250	725	70	338	282		105	10.9	9.9	10.3	9.3	L112×50×4t	350	430	112	10.5
	425	40	75	9.1		8.1	8.6	7.6	L82×50×4t	82	8.6				
300	730	70	388	332		105	11.9	10.8	11.3	10.2	L112×50×4t	400	480	112	10.5
	430	40	75	10.0		8.9	9.5	8.4	L82×50×4t	82	8.6				
350	735	70	438	382		105	15.3	11.6	14.7	11.1	L112×50×4t	450	530	112	10.5
	435	40	75	13.3		9.7	12.8	9.1	L82×50×4t	82	8.6				
400	740	70	488	432		105	19.2	12.5	18.7	11.9	L112×50×4t	500	580	112	10.5
	440	40	75	17.2		10.4	15.6	9.8	L82×50×4t	82	8.6				


T-14, T-2 3t受枠仕様 充填深さ 70/40mm

溝幅 (mm)	呼称	本体寸法					P10 スキマ=6.00		P15 スキマ=11.00		受枠				
							適用荷重								
		h ₁	W	W ₁	L	h	T-14	T-2	T-14	T-2	アングルサイズ	A	A ₁	H	質量 (kg/両側m)
							質量(kg/ 枚)	質量(kg/ 枚)	質量(kg/ 枚)	質量(kg/ 枚)					
100	710	70	190	134	599	105	8.0	7.3	7.5	6.8	L111×50×3t	200	280	111	8.1
	410	40				75	6.5	5.8	6.0	5.3	L81×50×3t			81	6.7
150	715	70	240	184		105	9.0	8.2	8.5	7.7	L111×50×3t	250	330	111	8.1
	415	40				75	7.5	6.6	6.9	6.1	L81×50×3t			81	6.7
200	720	70	290	234		105	10.0	9.1	9.4	8.5	L111×50×3t	300	380	111	8.1
	420	40				75	8.3	7.4	7.7	6.8	L81×50×3t			81	6.7
250	725	70	340	284		105	10.9	9.9	10.4	9.4	L111×50×3t	350	430	111	8.1
	425	40				75	9.2	8.1	8.5	7.6	L81×50×3t			81	6.7
300	730	70	390	334		105	11.9	10.8	11.4	10.3	L111×50×3t	400	480	111	8.1
	430	40				75	10.1	8.9	9.5	8.4	L81×50×3t			81	6.7
350	735	70	440	384		105	15.3	11.7	14.8	11.1	L111×50×3t	450	530	111	8.1
	435	40				75	13.4	9.7	12.8	9.1	L81×50×3t			81	6.7
400	740	70	490	434		105	19.3	12.5	18.8	11.9	L111×50×3t	500	580	111	8.1
	440	40				75	17.2	10.4	16.7	9.9	L81×50×3t			81	6.7

歩道用 充填深さ 70/30mm


溝幅 (mm)	呼称	本体寸法					P10 スキマ=6.00		P15 スキマ=11.00		受枠				
							適用荷重								
		h ₁	W	W ₁	L	h	歩道				アングルサイズ	A	A ₁	H	質量 (kg/両側m)
							質量(kg/ 枚)		質量(kg/ 枚)						
100	710	70	190	134	599	94	7.0		6.4	L100×50×3t	200	280	100	7.6	
	310	30				54	4.8		4.3	L60×50×3t			60	5.7	
150	715	70	240	184		94	7.8		7.2	L100×50×3t	250	330	100	7.6	
	315	30				54	5.5		5.0	L60×50×3t			60	5.7	
200	720	70	290	234		94	8.6		8.0	L100×50×3t	300	380	100	7.6	
	320	30				54	6.2		5.6	L60×50×3t			60	5.7	
250	725	70	340	284		94	9.4		8.8	L100×50×3t	350	430	100	7.6	
	325	30				54	6.8		6.3	L60×50×3t			60	5.7	
300	730	70	390	334		94	10.2		9.6	L100×50×3t	400	480	100	7.6	
	330	30				54	7.5		6.9	L60×50×3t			60	5.7	
350	735	70	440	384		94	11.0		10.4	L100×50×3t	450	530	100	7.6	
	335	30				54	8.1		7.6	L60×50×3t			60	5.7	
400	740	70	490	434		94	11.8		11.2	L100×50×3t	500	580	100	7.6	
	340	30				54	8.8		8.2	L60×50×3t			60	5.7	

PA-14/PA-2

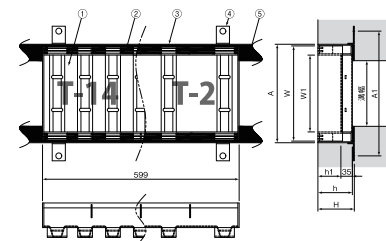


部品構成 材質:SUS304

①底波板 ②スリットバー
③受枠 ④アンカー
⑤ゴムクッション(NR)




PA-歩

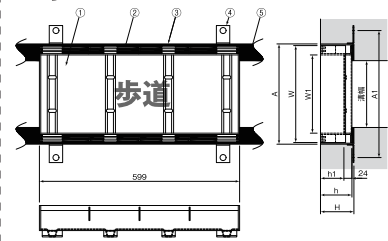

部品構成 材質:SUS304

①底波板 ②スリットバー
③受枠 ④アンカー
⑤ゴムクッション(NR)



●適用荷重の表記について、歩(歩道用)はT-2未満です。●規格外サイズ・異形・特殊仕様の設計、製作も承ります。●ご注意：みぞふた本体の質量は定尺599mmの数値です。